

# automotive booths

## EZ LIMITED FINISHING PREP STATION

- EZ TO INSTALL
- EZ TO OPERATE
- EZ TO MAINTAIN
- EZ TO ADD HEAT

### DESCRIPTION

The Col-Met EZ Limited Finishing Prep Station draws fresh air from the cleaner upper levels of the shop through a pressurization fan. This air is forced down into the prep station through a filter bank located in the ceiling near the entry. The air is drawn through the prep station work area into a filtered exhaust plenum at the opposite end and exhausted out to the atmosphere through the exhaust fan and stack.

This design allows for easy addition of a heated air makeup unit.

### LIGHTING FEATURES

Bright full booth illumination is provided by eight (8) four-tube, 48" long, 32-watt, fluorescent light fixtures in the ceiling panels. Each is sealed behind clear tempered safety glass. All fixtures are UL listed and approved for their intended use and placement. The light tubes are not furnished with the fixtures.

### CONSTRUCTION FEATURES AND QUALITY STANDARDS

The Hanging Intake Plenum and Exhaust Plenum Wall will be fabricated with 18-gauge galvanized steel panels; flanged for strength and pre-punched for easy nut and bolt assembly. The intake plenum may be suspended with a maximum of 10' tall clearance or as low as 7' tall clearance. The actual installed height is required to order the Goff's™ Curtain walls.

Intake air is supplied by one (1) 18" diameter tubeaxial fan with a 1 1/2 HP, three-phase motor. Exhaust is provided by one (1) 18" diameter tubeaxial fan with a 1 1/2 HP, three-phase motor.

Panels, assembly hardware, filters, and sealants needed for mechanical installation are included. The threaded rod for suspending the intake plenum is not supplied by Col-Met. Goff's™



Curtain walls, intake and exhaust stack, control panel, and other electrical components may be purchased separately.

Col-Met Spray Booth's EZ Limited Finishing Prep Station complies with NFPA 33 regulations pertaining to limited finishing workstations. Optional ® listing is available on this product.


**Col-Met Spray Booth products comply with OSHA and NFPA 33 regulations.**

**BOOTH CHART WITH DIMENSIONS AND DRAWINGS ON REVERSE SIDE**

# BOOTH CHART WITH DIMENSIONS AND SPECIFICATIONS

## EZ LIMITED FINISHING PREP STATION

Model Number	Interior Dimensions			Exterior Dimensions			Nominal Clear Entry		Lights Open	Air Flow SCFM	Fan Spec.		Filters	
	Width	Height	Length	Width	Height	Length	Width	Height			HP	Int.	Ext.	
EPS-26-PSB	14'-0"	10'-0"	24'-0"	14'-4"	12'-2"	26'-2"	14'-0"	10'-0"	8	4,000	18"	1 1/2	12	12

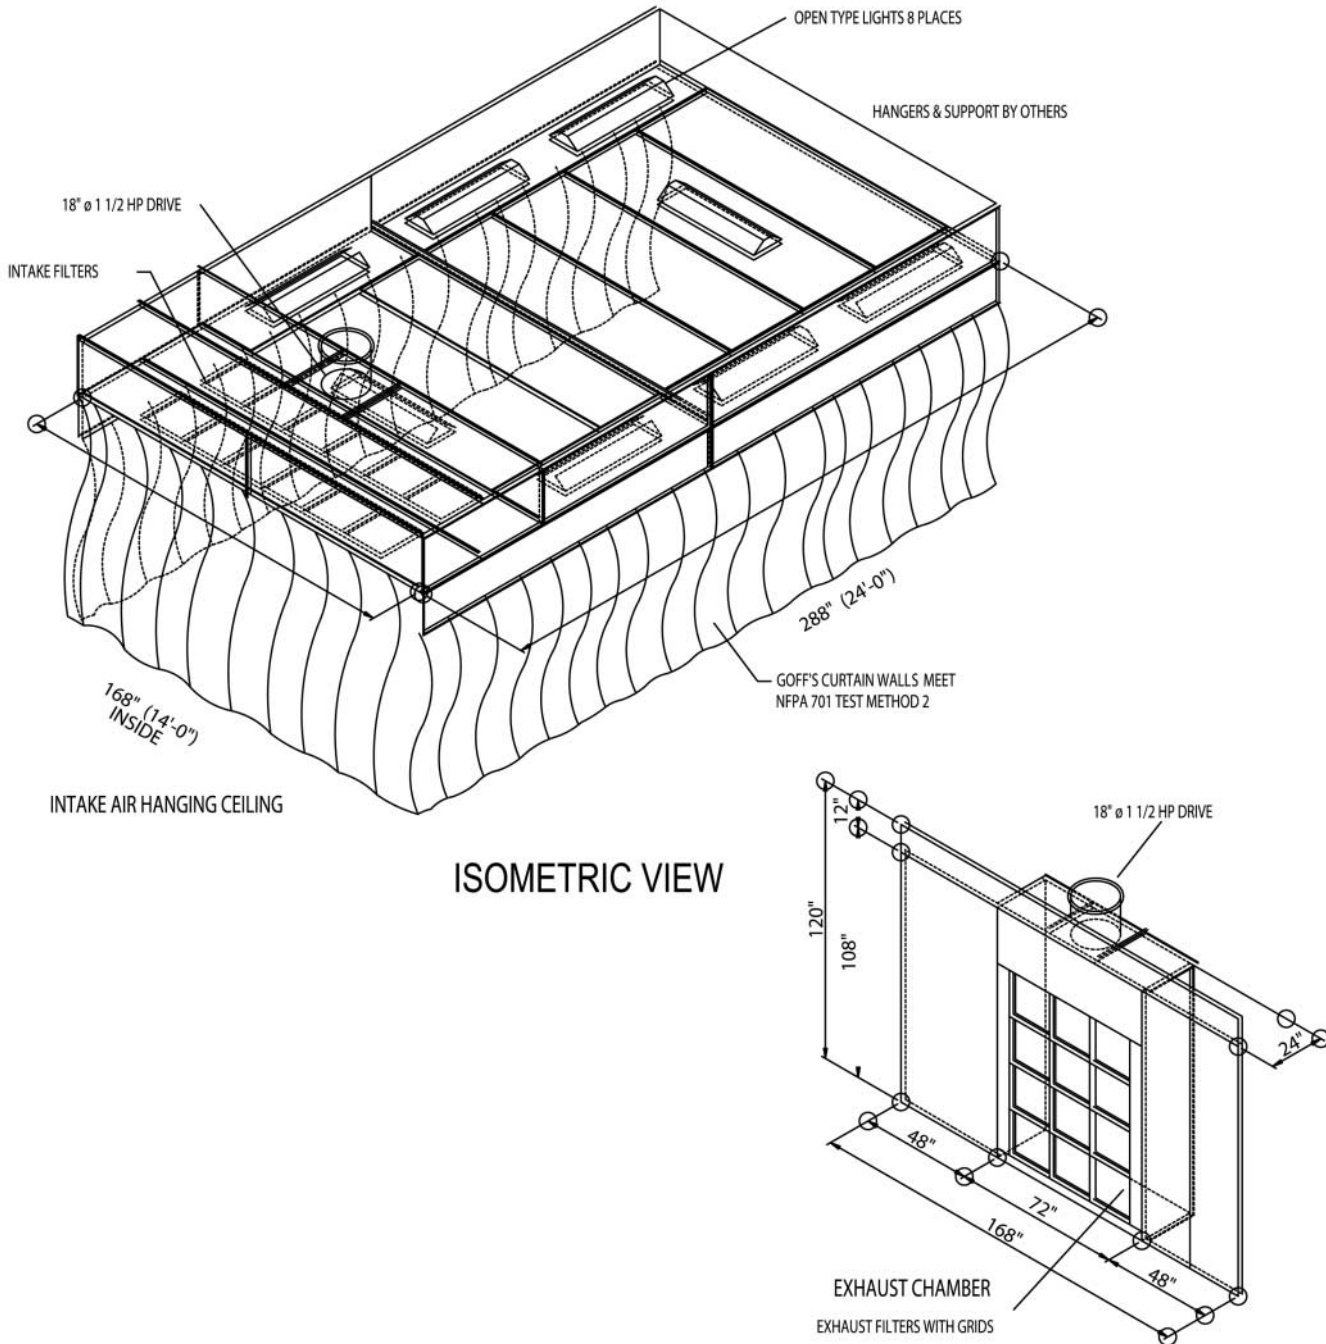

**Col-Met Spray Booths, Inc.**  
 Dallas, TX // e-mail: sales@colmetsb.com  
 toll free: 888.452.6684 // www.colmetsb.com